

Avibulb® BN01


For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Low carbon steel*	Corps: Acier bas carbone*	Hülse: Stahl*	Corpo: Acciaio a basso tenore di carbonio*	Cuerpo: Acero bajo en carbono*
Zinc plated Clear trivalent passivated	Revêtement zingué Passivation claire trivalente	Verzinkt Klar chromatiert, Cr6-frei	Zincato Passivazione chiara trivalente	Zincado Pasivado claro trivalente
Stem: Medium carbon steel**	Tige: Acier au carbone**	Dorn: Stahl**	Gambo: Acciaio a medio tenore di carbonio**	Vástago: Acero medio en carbono**
Zinc plated Clear trivalent passivated	Revêtement zingué Passivation claire trivalente	Verzinkt Klar chromatiert, Cr6-frei	Zincato Passivazione chiara trivalente	Zincado Pasivado claro trivalente

*: BS3111 Type 0, SAE 1008, DIN 1654, QSt 34-3 / BS3111 Type 0, SAE 1015 DIN 1711, RSt 38-2, Werkstoff 1.0401

** : BS3111 Type 1, SAE 1030/1037/1040/1045, Werkstoff 1.1178/1.1176/1.1186/1.1191

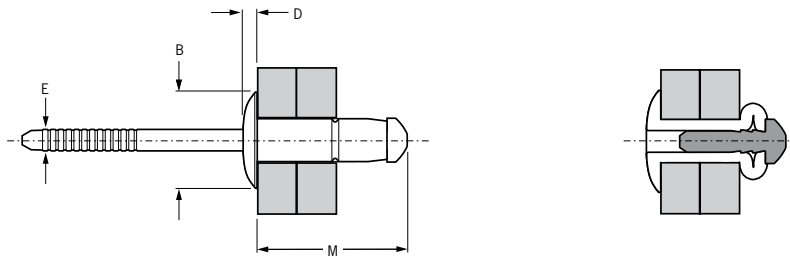

ø	[Cross-section diagram]		[Thread diagram]		M	B	D	E	[Arrow diagram]	[Diamond symbol]	Part No/ref
	nom.	min.	max.	min.							
1/8" (3.2 mm)	.039	.118	.130	.134	.358	.268	.055	.080	270	292	OBN01-00408
	.118	.197			.461						OBN01-00411
	.197	.276			.551						OBN01-00414
5/32" (4.0 mm)	.039	.118	.161	.169	.409	.315	.059	.103	539	629	OBN01-00509
	.118	.197			.508						OBN01-00512
	.197	.276			.618						OBN01-00516
	.275	.354			.713						OBN01-00519
3/16" (4.8 mm)	.059	.138	.193	.201	.476	.378	.059	.126	809	854	OBN01-00611
	.138	.236			.579						OBN01-00614
	.236	.335			.693						OBN01-00618
6.0 mm	.059	.157	.240	.248	.551	.484	.083	.158	944	1213	OBN01-06010
	.118	.236			.669						OBN01-06013
	.236	.354			.787						OBN01-06016
	.335	.472			.906						OBN01-06019
1/4" (6.4 mm)	.059	.217	.260	.276	.661	.528	.122	.192	2248 ³⁾	1484 ³⁾	OBN01-00816
	.197	.354			.819						OBN01-00820

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

2) through stem / avec tige / bei tragendem Restdorn / attraverso il gambo / con vástago

3) min. values / valeurs min. / min. Werte / Valori min. / valores min.



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Avibulb® is a trademark of Avdel UK Limited

01.2009

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.