


Bulbex® BF01



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy* Natural	Corps: Alliage d'aluminium* Brut	Hülse: Aluminium* Blank	Corpo: Lega di alluminio* Nessuna finitura	Cuerpo: Aluminio* Natural
Stem: Aluminium alloy** Natural	Tige: Alliage d'aluminium** Brut	Dorn: Aluminium** Blank	Gambo: Lega di alluminio** Nessuna finitura	Vástago: Aluminio** Natural

*: $\varnothing 5/32" = 5754 / \varnothing 3/16" = 5052$
 **: 5056

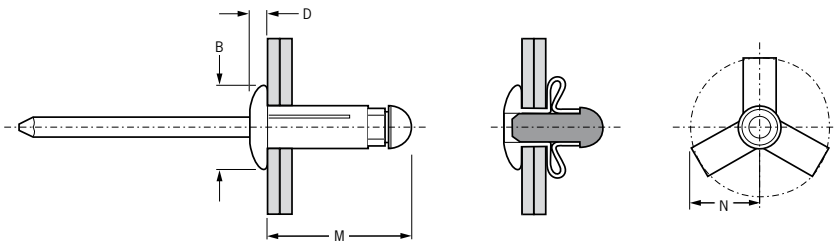

Ø					M	B	D	N	 lbf ¹⁾	 lbf ¹⁾	Part No/ref
	nom.	min.	max.	min.							
5/32" (4.0 mm)	.040	.118	.165	.177	.630	.321	.060	.228	135	225	0BF01-00516
	.040	.275			.840			.315			0BF01-00523
	.040	.335			.900			.341			0BF01-00525
	.197	.472			1.087			.355			0BF01-00531
3/16" (4.8 mm)	.040	.157	.197	.207	.720	.396	.080	.267	175	240	0BF01-00619
	.040	.354			.920			.355			0BF01-00625
	.157	.472			1.070			.441			0BF01-00630

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas