

# Hemlok® 2241




For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

| English   | Français   | Deutsch                                  | Italiano   | Español                                   |
|---|--|--|--|---|
| Protruding head                                 | Tête bombée                                      | Flachrundkopf                            | Testa tonda  | Cabeza alomada                            |
| Body: Aluminium alloy*<br>(2.5 % Mg)<br>Natural | Corps: Alliage<br>d'aluminium* (2.5% Mg)<br>Brut | Hülse: Aluminium*<br>(2.5 % Mg)<br>Blank | Corpo: Lega di alluminio*<br>(2.5% Mg)<br>Nessuna finitura | Cuerpo: Aluminio*<br>(2.5% Mg)<br>Natural |
| Stem: Aluminium alloy**<br>Natural              | Tige: Alliage d'aluminium**<br>Brut              | Dorn: Aluminium**<br>Blank               | Gambo: Lega di alluminio**<br>Nessuna finitura             | Vástago: Aluminio**<br>Natural            |

\*: EN AW-5052, AlMg2.5

\*\* : EN AW-7075 AlZn5.5MgCu

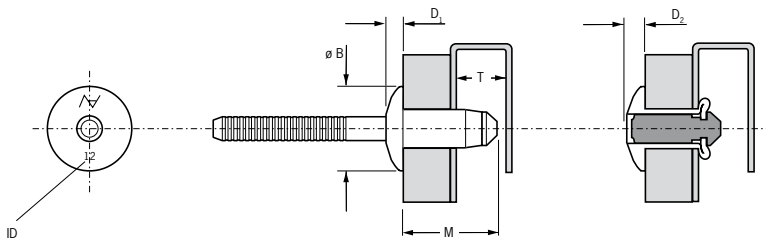

| ø                | Ø    |      | Ø B  |      | ID | M    | ø B  | D <sub>1</sub> | T    | D <sub>2</sub> | lb f min. | lb f min. | Part No/ref |
|------------------|------|------|------|------|----|------|------|----------------|------|----------------|-----------|-----------|-------------|
|                  | min. | max. | min. | max. |    |      |      |                |      |                |           |           |             |
| 1/4"<br>(6.4 mm) | .060 | .138 | .264 | .272 | 12 | .539 | .527 | .105           | .480 | .134           | 1124      | 600       | 02241-00812 |
|                  | .110 | .189 |      |      | 13 | .590 |      |                |      |                | 1349      |           | 02241-00813 |
|                  | .132 | .211 |      |      | 14 | .612 |      |                |      |                | 1394      |           | 02241-00814 |
|                  | .189 | .268 |      |      | 15 | .669 |      |                |      |                | 1460      |           | 02241-00815 |
|                  | .268 | .346 |      |      | 17 | .747 |      |                |      |                | 1574      |           | 02241-00817 |
|                  | .346 | .425 |      |      | 19 | .826 |      |                |      |                | 1574      |           | 02241-00819 |
|                  | .425 | .504 |      |      | 21 | .905 |      |                |      |                | 1574      |           | 02241-00821 |

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas



An Acument™ Global Technologies Company

[www.avdel-global.com](http://www.avdel-global.com)

© 2007 Acument Intellectual Properties, LLC

Hemlok® is a trademark of Avdel UK Limited

01.2009

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Avdel representative is at your disposal should you need to confirm latest information.