


Monobolt® 2721

For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



English	Français	Deutsch	Italiano	Español
Countersunk head	Tête fraisée	Senkkopf	Testa svasata	Cabeza avellanada
Body: austenitic stainless steel*	Corps: Inox austénitique*	Hülse: Edelstahl*	Corpo: Acciaio inox austenitico*	Cuerpo: Acero inoxidable austenítico*
Bright	Poli	Blank	Lucido	Pulido
Stem: austenitic stainless steel*	Tige: Inox austénitique*	Dorn: Edelstahl*	Gambo: Acciaio inox austenitico*	Vástago: Acero inoxidable austenítico*
Natural	Brut	Unbehandelt	Nessuna finitura	Natural

*: AISI 304, modified by addition of 3 - 4 % copper

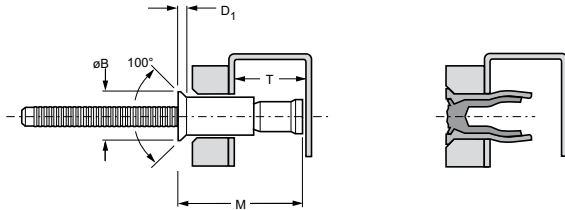

ø	[Cross-section diagram]		[Thread diagram]		M	ø B	D ₁	T	[Torque diagram]	[Strength diagram]	Part No/ref
	nom.	min.	max.	min.							
3/16" (4.8 mm)	.125	.331	.195	.201	.786	.325	.084	.410	1450	1150	02721-00615
1/4" (6.4 mm)	.125	.475	.260	.276	1.037	.395	.093	.480	2650	2350	02721-00821

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas