


# T-Lok® BM01



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: medium carbon steel*	Corps: Acier au carbone*	Hülse: Stahl*	Corpo: Acciaio carbonio*	Cuerpo: Acero medio en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente
Stem: Low carbon steel**	Tige: Acier bas carbone**	Dorn: Stahl**	Gambo: Acciaio a basso tenore di carbonio**	Vástago: Acero bajo en carbono**
Zinc coated	Revêtement zingué	Verzinkt	Zincato	Zincado

\*: BS970 Type 0, SAE 1015, DIN 17111, RSt 38-2, Werkstoff 1.0401  
 \*\*: BS3111 Type 0, SAE 1015/1018/1022, DIN 1654, Cq15/Cq22

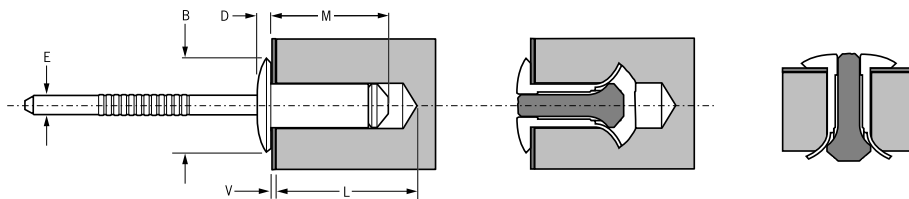

Ø	🌀		M	B	D	E	V		L min.		🏠	Part No/ref	
	nom.	min.					max.	max.	max.	max.			min.
5/32" (4.3 mm)	.169	.174	.430	.321	.051	.099	.050	.010	.440	.480	110	OBM01-00510	
			.490						.510	.540		OBM01-00512	
			.740						.500	.790		160	OBM01-00520
			.800						.500	.850			OBM01-00522
3/16" (4.8 mm)	.187	.193	.570	.401	.081	.114	.120	.010	.410	.620	220	OBM01-00614	
			.750						.510	.800		OBM01-00620	

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas