



DK DKA



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Splined body	Fût cannelé	Gerändelter Schaft	Corpo zigrinato	Cuerpo estriado
Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Clear protective coating	Couche protectrice claire	Klare Schutzschicht	Strato protezione chiaro	Capa protectora clara

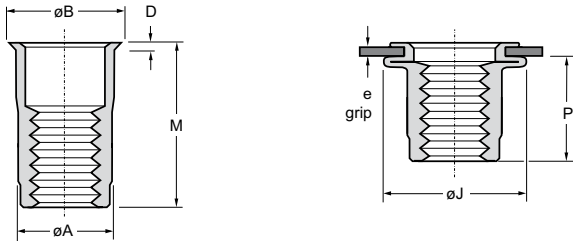

Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +.006/-0	øA max.	øB ±.010	D ±.002	øJ max.	M ±.015	P max.	Part No/ref															
	min.	max.																							
6-32 UNC	.020	.080	.2656	.265	.310	.019	.390	.420	.305	DKA-632-80															
	.080	.130								DKA-632-130															
8-32 UNC	.020	.080								.2969	.296	.340	.450	.420	.315	DKA-832-80									
	.080	.130														DKA-832-130									
10-24 UNC	.020	.130								.3906	.390	.455	.022	.550	.475	.380	DKA-1024-130								
	.130	.225															DKA-1024-225								
10-32 UNF	.020	.130					.5312	.530	.595								.740	.585	.470	DKA-1032-130					
	.130	.225																		DKA-1032-225					
1/4-20 UNC	.027	.165					.5312	.530	.595								.740	.690	.470	.425	DKA-420-165				
	.165	.260																			DKA-420-260				
1/4-28 UNF	.027	.165												.5312	.530	.595					.740	.680	.470	.425	DKA-428-165
	.165	.260																							DKA-428-260
5/16-18 UNC	.027	.150	.5312	.530	.595	.740								.690	.470	.425					DKA-518-150				
	.150	.312																			DKA-518-312				
5/16-24 UNF	.027	.150																.5312	.530	.595	.740	.690	.470	.425	DKA-524-150
	.150	.312																							DKA-524-312
3/8-16 UNC	.027	.150								.5312	.530	.595	.740					.690	.470	.425	DKA-616-150				
	.150	.312																			DKA-616-312				
3/8-24 UNF	.027	.150												.5312	.530	.595					.740	.690	.470	.425	DKA-624-150
	.150	.312																							DKA-624-312

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2008 Acument Intellectual Properties, LLC

09a.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.