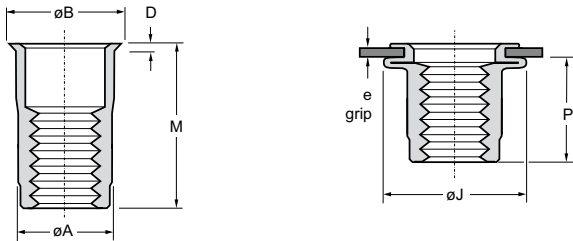



# DK DKS







For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Splined body	Fût cannelé	Gerändelter Schaft	Corpo zigrinato	Cuerpo estriado
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente



Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +0.006/-0	øA max.	øB ±.010	D ±.002	øJ max.	M ±.015	P max.	Part No/ref
	min.	max.								
6-32 UNC	.020	.080	.2656	.265	.310	.019	.390	.420	.305	DKS-632-80
	.080	.130						.470		DKS-632-130
8-32 UNC	.020	.080	.2969	.296	.340	.019	.450	.420	.315	DKS-832-80
	.080	.130						.470		DKS-832-130
10-24 UNC	.020	.130	.3906	.390	.455	.019	.550	.475	.380	DKS-1024-130
10-32 UNF	.130	.225						.585		DKS-1024-225
	1/4-20 UNC	.020	.130	.5312	.530	.595	.022	.740	.475	.425
1/4-28 UNF		.130	.225						.585	
	1/4-20 UNC	.027	.165	.3906	.390	.455	.019	.550	.580	.380
1/4-28 UNF		.165	.260						.680	
	5/16-18 UNC	.027	.165	.5312	.530	.595	.022	.740	.580	.470
5/16-24 UNF		.165	.260						.680	
	5/16-18 UNC	.027	.150	.5312	.530	.595	.022	.740	.690	.425
5/16-24 UNF		.150	.312						.805	
	3/8-16 UNC	.027	.150	.5312	.530	.595	.022	.740	.690	.470
3/8-24 UNF		.150	.312						.805	
	3/8-16 UNC	.027	.150	.5312	.530	.595	.022	.740	.690	.470
3/8-24 UNF		.150	.312						.805	
	3/8-16 UNC	.027	.150	.5312	.530	.595	.022	.740	.690	.470
3/8-24 UNF		.150	.312						.805	

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

Thread / filetage / Gewinde / filetto / rosca				
	Recommended max torque	Pull-out	Torque-to-turn	Push-out
	lbf-in	lbf	lbf-in	lbf
6-32 UNC	47	520	10	180
8-32 UNC	65			
10-24 UNC	95	630	12	335
10-32 UNF		685		
1/4-20 UNC	235	1115	24	510
1/4-28 UNF	N/A			
5/16-18 UNC				
5/16-24 UNF				
3/8-16 UNC				
3/8-24 UNF				