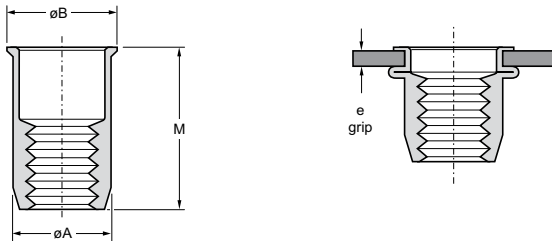



Nutsert® / TSN® 9654, 9655, 9665







For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué,	Verzinkt	Zincato	Zincado
Clear chromated	Passivation claire	Klar chromatiert	Passivazione chiara	Pasivado claro



Thread / filetage / Gewinde / filetto / rosca	e (grip)				øA	øB	M	Part No/ref
	min.	max.	min.	max.				
6-32 UNC	.020	.079	.250	.254	.249	.287	.410	09655-00613
8-32 UNC	.020	.079	.250	.254	.249	.287	.410	09655-00813
10-24 UNC	.020	.118	.281	.285	.280	.320	.465	09655-01014
	.125	.225	.281	.285	.280	.320	.575	09665-01018
1/4-20 UNC	.030	.128	.375	.379	.374	.415	.610	09654-00819
5/16-18 UNC	.040	.200	.500	.504	.499	.540	.720	09654-01000
3/8-16 UNC	.040	.200	.500	.504	.499	.540	.720	09654-01200

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

Thread / filetage / Gewinde / filetto / rosca				
	Recommended max torque lbf in max.	Pull-out lbf	Torque-to-turn lbf in min.	Push-out lbf
6-32 UNC	45	920	17	310
8-32 UNC	45	920	17	310
10-24 UNC	70	1280	23	445
1/4-20 UNC	110	1520	30	560
5/16-18 UNC	145	3300	31	632
3/8-16 UNC	NA	NA	NA	NA

