

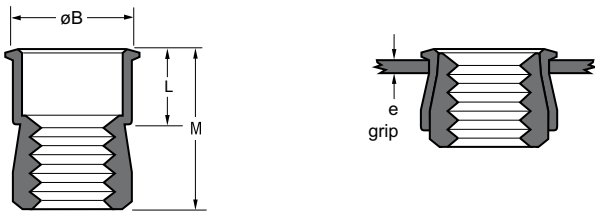
Standard Nutsert® 9504, 9505



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Carbon steel* Cadmium plated	Acier carbone* Revêtement cadmium	Stahl* Kadmiert	Acciaio carbonio* Cadmato	Acero carbono* Cadmado

* : 12L14-T



Thread / filetage / Gewinde / filetto / rosca	e (grip)		rec.	øB max.	L max.	M	Part No/ref
	min.	max.					
4-40 UNC	.030	.090	.1875	.1870	.190	.385	09505-00400
	.091	.124	.1935				
	.125	.186	.1935				
	› .186		.1935				
6-32 UNC	.030	.090	.2187	.2186	.190	.385	09505-00600
	.091	.124	.2210				
	.125	.186	.2280				
	› .186		.2280				
8-32 UNC	.030	.090	.2500	.2499	.190	.385	09505-00800
	.091	.124	.2570				
	.125	.186	.2656				
	› .186		.2656				
10-24 UNC	.030	.090	.2812	.2810	.190	.385	09505-01000
	.091	.124	.2900				
	.125	.186	.2968				
	› .186		.2968				
1/4-20 UNC	.030	.090	.3750	.3749	.262	.525	09504-00800
	.091	.124	.3750				
	.125	.186	.3860				
	› .186		.3906				
5/16-18 UNC	.030	.090	.5000	.4999	.312	.625	09504-01000
	.091	.124	.5000				
	.125	.186	.5156				
	› .186		.5156				

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas



An Acument™ Global Technologies Company

www.avdel-global.com





© 2008 Acument Intellectual Properties, LLC

Nutsert® is a trademark of Avdel UK Limited

02a.2008, page 1/2

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.

Standard Nutsert® 9504, 9505

Thread / filetage / Gewinde / filetto / rosca	 Recommended max. torque	 Pull-out	 Torque-to-turn	 Push-out
	lbf in	lbf	lbf in	lbf
4-40 UNC	13	697	2	20
6-32 UNC	45	1027	3	30
8-32 UNC	70	1330	5	30
10-24 UNC	110	1937	10	50
1/4-20 UNC	110	1937	10	50
5/16-18 UNC	145	3325	15	60



An Acument™ Global Technologies Company

www.avdel-global.com

© 2008 Acument Intellectual Properties, LLC

Nutsert® is a trademark of Avdel UK Limited

02a.2008, page 2/2

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
Your local Avdel representative is at your disposal should you need to confirm latest information.