


Briv® 1821



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

*: SAE 1008 / EN 10263-2 C8C (DIN 10263-2 C8C, Qst 34-3)

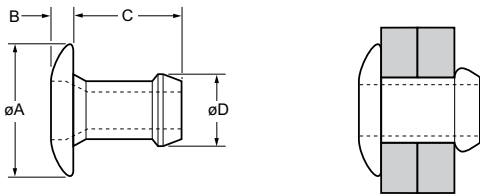






ø	Ø		Ø		øA	B	C	øD	lb ^{f1}	lb ^{f1}	Fasteners per pod/ Nombre de rivets par chargeur / Niete pro Magazin / Rivetti per caricatore / Uds./carga ± 1	Part No/ref														
	min.	max.	min.	max.									max.	max.	max.	max.										
1/8"	.025	.075	.1285	.1315	.257	.039	.152	.1245	255	410	59	01821-00403														
	.045	.095					.172						58	01821-00404												
	.065	.115					.192								50	01821-00405										
	.085	.135					.212										48	01821-00406								
	.125	.175					.252												42	01821-00408						
	.165	.215					.292														37	01821-00410				
	.205	.255					.332																33	01821-00412		
	.245	.295					.372																		29	01821-00414
	.285	.335					.412																			
5/32"	.062	.115	.1562	.1592	.322	.039	.193	.1535	370	630	52	01821-00505														
	.085	.135					.213						49	01821-00506												
	.105	.155					.233								44	01821-00507										
	.145	.195					.273										39	01821-00509								
	.185	.235					.313												34	01821-00511						
	.225	.275					.353														31	01821-00513				
	.265	.315					.393																26	01821-00515		
	.305	.355					.433																		24	01821-00517

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

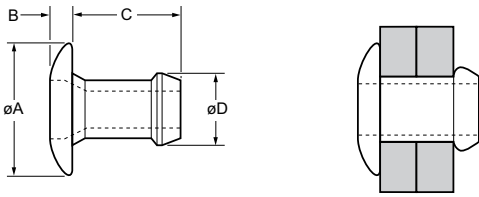



ø					øA	B	C	øD			Fasteners per pod/ Nombre de rivets par chargeur / Niete pro Magazin / Rivetti per caricatore / Uds./carga ± 1	Part No/ref
	min.	max.	min.	max.								
3/16"	.065	.130	.1910	.1940	.382	.046	.212	.1885	505	835	46	01821-00606
	.080	.155					.240				42	01821-00607
	.145	.205					.290				35	01821-00609
	.195	.255					.340				31	01821-00611
	.245	.305					.390				27	01821-00613
	.295	.355					.440				24	01821-00615
	.345	.405					.490				22	01821-00617
6.0 mm	.105	.155	.2338	.2373	.455	.053	.273	.2335	580	950	37	01821-06007
	.145	.195					.313				33	01821-06009
	.185	.235					.353				29	01821-06011
	.225	.275					.393				26	01821-06013
	.265	.315					.433				24	01821-06015
	.305	.355					.473				23	01821-06017

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas