


Briv® 1822



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
120° Countersunk	120° Tête fraisée	120° Senkkopf	120° Testa svasata	120° Cabeza avellanada
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

*: SAE 1008 / EN 10263-2 C8C (DIN 10263-2 C8C, Qst 34-3)

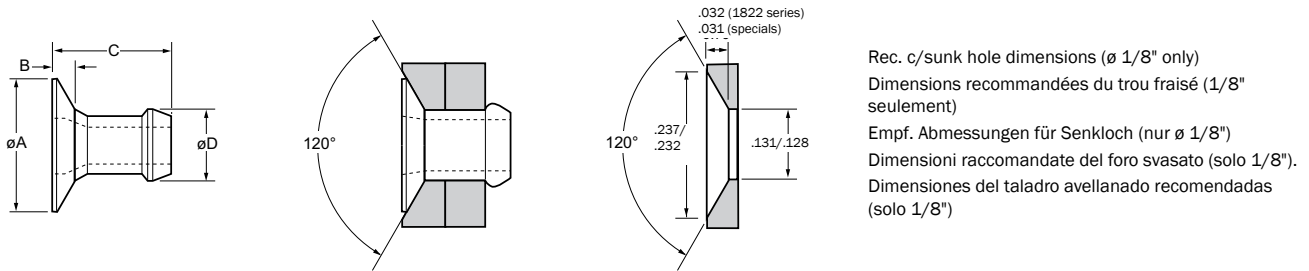

ø	Ø		Ø		øA	B	C	øD	lb ^{f1}	lb ^{f1}	Fasteners per pod/ Nombre de rivets par chargeur/ Niete pro Magazin/ Rivetti per caricatore/ Uds./carga ± 1	Part No/ref
	min.	max.	min.	max.								
1/8"	.060	.110	.1285	.1315	.230	.030	.188	.1245	213	370	64	01822-00406
	.100	.150					.228				52	01822-00407
	.140	.190					.268				44	01822-00408
	.180	.230					.308				38	01822-00410
	.220	.270					.348				33	01822-00411
5/32"	.062	.115	.1562	.1592	.240	.040	.204	.1535	370	630	59	01822-00505
	.086	.135					.224				54	01822-00506
	.105	.155					.244				49	01822-00507
	.145	.195					.284				42	01822-00509
	.185	.235					.324				36	01822-00511
	.225	.275					.364				32	01822-00513

Special Option: designed for thin sheet applications / Conçu pour des applications de faible épaisseur / für geringe Materialstärken /
 Progettato per applicazioni in spessori sottili/ Diseñado para aplicaciones de chapa fina

1/8"	.050	.090	.1285	.1315	.230	.029	.170	.1245	213	370	72	01810-06480
	.057	.067				.027	.165				72	01810-10375

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

