

Interlock® BAPI


For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy* (5 % Mg) Natural	Corps: Alliage d'aluminium* (5% Mg) Brut	Hülse: Aluminium* (5 % Mg) Blank	Corpo: Lega di alluminio* (5% Mg) Nessuna finitura	Cuerpo: Aluminio* (5% Mg) Natural
Stem: Aluminium alloy** Natural	Tige: Alliage d'aluminium** Brut	Dorn: Aluminium** Blank	Gambo: Lega di alluminio** Nessuna finitura	Vástago: Aluminio** Natural

*: BS 1473 5056 DIN 1725 AIMg5 Werkstoff 3.3555

** : 7178

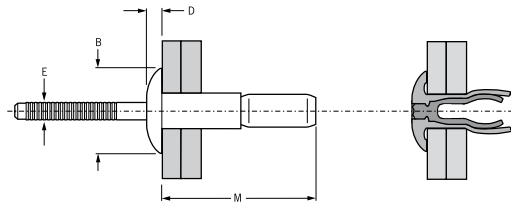

ø					M	B	D	E			Part No/ref
	nom.	min.	max.	min.							
4.8 (3/16")	1.57	6.35	4.93	5.18	21.4	10.2	2.3	3.1	2.4	2.0	BAPI-06-04
	5.44	11.10			22.3						BAPI-06-07
	9.53	15.88			27.7						BAPI-06-10
	1.57	11.10			24.8						BAPI-E06-07
6.4 (1/4")	2.03	9.53	6.63	7.01	30.0	13.5	3.0	4.1	5.6	3.6	BAPI-08-06
	8.89	15.88			33.1						BAPI-08-10
	2.03	15.88			35.6						BAPI-E08-10

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas