

# Monobolt® 2764




For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Countersunk head	Tête fraisée	Senkkopf	Testa svasata	Cabeza avellanada
Body: Aluminium alloy* (5 % Mg) Polished	Corps: Alliage d'aluminium* (5% Mg) Poli	Hülse: Aluminium* (5 % Mg) Poliert	Corpo: Lega di alluminio* (5% Mg) Lucido	Cuerpo: Aluminio* (5% Mg) Pulido
Stem: Aluminium alloy** Natural	Tige: Alliage d'aluminium** Brut	Dorn: Aluminium** Blank	Gambo: Lega di alluminio** Nessuna finitura	Vástago: Aluminio** Natural

\*: BS 1473 5056A DIN 1725 AlMg5 Werkstoff 3.3555

\*\* : BS 1473 2014A DIN 1725 AlCuSiMn Werkstoff 3.1255

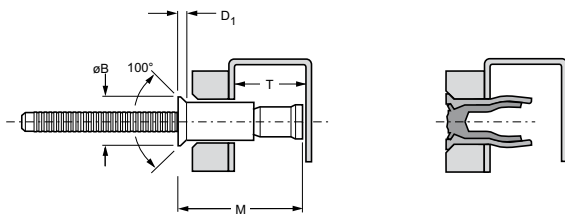

ø	[Cross-section diagram]		[Thread diagram]		M	ø B	D <sub>1</sub>	T	[Torque diagram]	[Torque diagram]	Part No/ref
	min.	max.	min.	max.							
4.8 (3/16")	3.17	8.41	4.9	5.1	20.0	8.3	2.2	10.5	2.8	2.1	02764-00615
	3.17	12.22			26.3			13.5			02764-00619
6.4 (1/4")	3.17	12.07	6.6	7.0	27.2	10.1	2.4	13.0	6.0	4.2	02764-00821

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas