


# Hexsert® 9498



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Large flange	A collerette	Flachkopf	Flangiato	Ala Ancha
Hexagonal body	Hexagonal corps	Hexagonaler Schaft	Hexagonal corpo	Hexagonal cuerpo
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated Clear trivalent passivated	Revêtement zingué, Passivation claire trivalente	Verzinkt Klar chromatiert, Cr6-frei	Zincatura spessore Passivazione chiara trivalente	Zincado Pasivado claro trivalente

\* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008

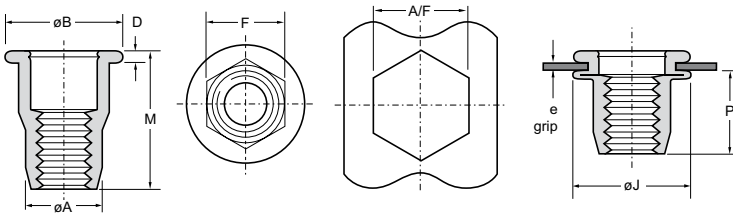

Thread / filetage / Gewinde / filetto / rosca	A/F rec.		e (grip)		± 0.08	max.	± 0.13	± 0.08	max.	± 0.50	max.	Part No/ref
	min.	max.	min.	max.	± 0.08	max.	± 0.13	± 0.08	max.	± 0.50	max.	
M4 x 0.7	6.00	6.10	0.50	2.00	5.89	9.17	1.00	5.89	9.20	10.00	5.00	09498-72415
M5 x 0.8	7.00	7.10	0.50	3.00	6.89	10.17	1.00	6.89	11.20	13.20	6.80	09498-72516
			3.00	5.50						15.70		09498-72520
M6 x 1.0	9.00	9.10	0.50	3.00	8.89	13.20	1.50	8.89	13.40	15.50	10.10	09498-72620
M8 x 1.25	11.00	11.10	0.50	3.00	10.89	16.28	1.50	10.89	16.20	18.00	11.40	09498-72823
			3.00	5.50						20.5		09498-72826
M10 x 1.5	13.00	13.10	1.00	3.50	12.89	19.10	2.00	12.89	18.50	21.0	13.20	09498-72026
M12 x 1.75	16.00	16.10	1.50	4.50	15.89	23.30	2.25	15.89	23.60	27.8	17.00	09498-72235

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread / filetage / Gewinde / filetto / rosca	 Recommended max torque	 Pull-out	 Torque-to-turn	 Push-out
	Nm max.	kN	Nm min.	kN
M4 x 0.7	5.1	6.3	4.5	2.2
M5 x 0.8	7.9	8.8	8.6	3.6
M6 x 1.0	12.4	14.4	11.9	5.3
M8 x 1.25	32.0	15.0	25.0	8.0
M10 x 1.5	45.0	19.7	45.2	9.2
M12 x 1.75	60.0	21.3	58.0	10.2



An Acument™ Global Technologies Company

[www.avdel-global.com](http://www.avdel-global.com)

© 2007 Acument Intellectual Properties, LLC

Hexsert® is a trademark of Avdel UK Limited

05a.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Avdel representative is at your disposal should you need to confirm latest information.