

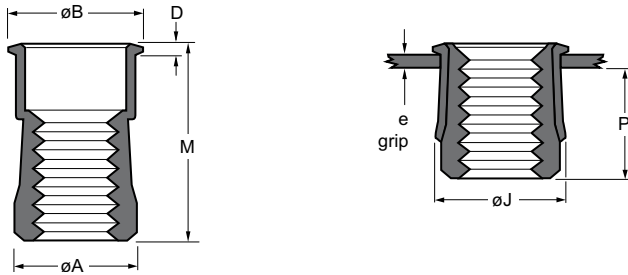
# Supersert® FB08




For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué,	Verzinkt	Zincatura spessore	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente
Lubricated	Lubrifié	Trockenfilmbeschichtet	Lubrificato	Lubricado





\* : BS 970 230 M07



Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +0.1/-0	øA max.	øB max.	D max	øJ max.	M nom.	P max.	Part No/ref
	min.	max.								
M3 x 0.5	0.80	2.30	4.77	4.75	5.50	0.50	5.70	10.50	4.50	0FB08-70313
	2.30	3.20	4.80							
	3.20	3.95	4.90							
	> 3.95		4.90							
M4 x 0.7	0.80	2.30	6.35	6.34	7.00	0.55	7.20	11.60	5.40	0FB08-70414
	2.30	3.20	6.40							
	3.20	3.95	6.50							
	> 3.95		6.60							
M5 x 0.8	0.80	1.60	7.14	7.13	7.90	0.60	8.20	11.60	5.40	0FB08-70514
	1.60	2.30	7.30							
	2.30	3.20	7.40							
	3.20	3.95	7.50							
M6 x 1.0	0.80	1.60	9.53	9.41	10.30	0.65	10.60	13.30	5.40	0FB08-70616
	1.60	2.30	9.60							
	2.30	3.20	9.70							
	3.20	3.95	9.80							
M8 x 1.25	1.60	2.30	12.70	12.69	13.50	0.65	13.80	15.90	5.80	0FB08-70820
	2.30	3.20	12.80							
	3.20	4.75	12.90							
	4.75	6.35	13.00							
	> 6.35		13.10							

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

# Supersert® FB08

Thread / filetage / Ge- winde / filetto / rosca				
	Recommended max. torque	Pull-out	Torque-to-turn	Push-out
	Nm max.	kN	Nm min.	kN
M3 x 0.5	1.1	3.1	0.2	0.2
M4 x 0.7	5.1	3.6	0.3	0.3
M5 x 0.8	7.9	6.2	0.6	0.5
M6 x 1.0	12.4	7.5	1.1	0.5
M8 x 1.25	16.4	9.3	1.7	0.5