



Avbolt® 21001



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español	****
Stem: Chromium Molybdenum steel* Black oxide	Tige: Acier* Noir	Dorn: Stahl* Schwarz	Gambo: Acciaio* Passivato nero	Vástago: Acero* Pavonado	 8 h
Sleeve: Carbon steel** Zinc plated Clear trivalent passivated	Douille: Acier** Revêtement zingué Passivation claire trivalente	Hülse: Stahl** Verzinkt Klar chromatiert, Cr6-frei	Bussola: Acciaio** Zincata Passivazione chiara trivalente	Cuerpo: Acero al carbono** Zincado Pasivado claro trivalente	 240 h
Collar: Carbon steel*** Zinc plated Clear trivalent passivated	Bague: Acier*** Revêtement zingué Passivation claire trivalente	Schließring: Stahl*** Verzinkt Klar chromatiert, Cr6-frei	Collare: Acciaio*** Zincato Passivazione chiara trivalente	Collar: Acero al carbono*** Zincado Pasivado claro trivalente	 240 h

*: EN 10263-4 34CrMo4 SAE 4135 SCM435 **: EN 10263-2 C8C SAE 1008 ***: EN 10263-4 23MnB4
 ****: to red rust / à la rouille rouge / bis Rotrost / alla ruggine rossa / al óxido rojo (ASTM B117)

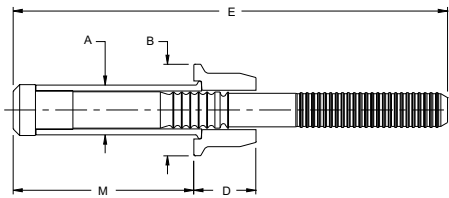

ø					ø A	ø B	D	D ₁	E	M	S	X	Z			Part No/ref
	nom.	min.	max.	min.												
10.0 (3/8")	4.78	7.95							73.78	25.10						21001-01204
	7.95	11.13							76.98	28.27						21001-01206
	11.13	14.30							80.18	31.45						21001-01208
	14.30	17.48							83.38	34.62						21001-01210
	17.48	20.65	10.49	11.05	10.47	18.77	12.65	14.51	86.58	37.80	18.34	15.5	9.58	45.00	32.25	21001-01212
	20.65	23.83							89.68	40.97						21001-01214
	23.83	27.00							92.88	44.15						21001-01216
	27.00	30.18							96.08	47.32						21001-01218
	30.18	33.35							99.28	50.50						21001-01220
16.0 (5/8")	6.35	12.70							102.71	39.35						21001-02004
	12.70	19.05							109.06	45.70						21001-02008
	19.05	25.40	17.45	18.49	17.30	29.47	17.45	20.07	115.41	52.05	30.48	25.4	16.01	129.00	91.19	21001-02012
	25.40	31.75							121.76	58.40						21001-02016
	31.75	38.10							128.11	64.75						21001-02020

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Notes / Notes / Hinweise / Note / Notas

Avbolt® fasteners are supplied with lubricated collars and must not be degreased.

Les bagues sont lubrifiées et ne doivent pas être dégraissées.

Schließringe sind mit einem Gleitmittel beschichtet, welches nicht entfernt werden darf.

I collari sono forniti lubrificati e non devono essere sgrassati.

Los collares se suministran lubricados y no deben ser desengrasados.



An Acument™ Global Technologies Company

www.avdel-global.com

© 2008 Acument Intellectual Properties, LLC

Avbolt® is a trademark of Avdel UK Limited

08.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.