

# Monobolt® 2774


For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy* (5 % Mg) Polished	Corps: Alliage d'aluminium* (5% Mg) Poli	Hülse: Aluminium* (5 % Mg) Poliert	Corpo: Lega di alluminio* (5% Mg) Lucido	Cuerpo: Aluminio* (5% Mg) Pulido
Stem: Aluminium alloy** Natural	Tige: Alliage d'aluminium** Brut	Dorn: Aluminium** Blank	Gambo: Lega di alluminio** Nessuna finitura	Vástago: Aluminio** Natural

\*: BS 1473 5056A DIN 1725 AlMg5 Werkstoff 3.3555

\*\* : BS 1473 2014A DIN 1725 AlCuSiMn Werkstoff 3.1255

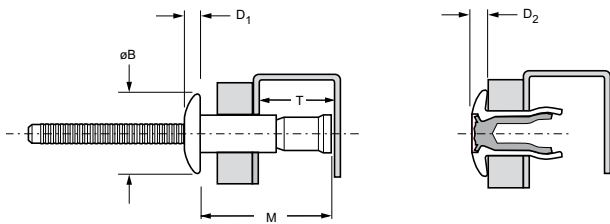

Ø	ØB		D1		M	Ø B	D <sub>1</sub>	T	D <sub>2</sub>	kN <sup>1)</sup>	kN <sup>1)</sup>	Part No/ref
	min.	max.	min.	max.								
4.8 (3/16")	1.63	6.86	4.9	5.1	18.4	10.1	2.1	10.5	1.9	3.0	2.2	02774-00613
	1.63	11.10			24.1			13.0				02774-00617
6.4 (1/4")	2.03	9.53	6.6	7.0	24.6	13.4	2.9	13.0	2.7	6.0	4.2	02774-00817
	2.03	15.87			34.7			18.1				02774-00824
10.0 (3/8")	3.04	15.88	9.95	10.4	36.2	20.3	4.1	22.3	4.0	12.6	9.3	02774-01228

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

[www.avdel-global.com](http://www.avdel-global.com)

© 2007 Acument Intellectual Properties, LLC

Monobolt® is a trademark of Avdel UK Limited

11.2009

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Avdel representative is at your disposal should you need to confirm latest information.