


Hemlok® 2221



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: medium carbon steel Zinc plated Clear trivalent passivated	Corps: Acier moyen carbone Revêtement zingué Passivation claire trivalente	Hülse: Stahl Verzinkt Klar passiviert, Cr6-frei	Corpo: Acciaio a medio tenore di carbonio Zincato Passivazione chiara trivalente	Cuerpo: Acero medio en carbono Zincado Pasivado claro trivalente
Stem: medium carbon steel Zinc plated Clear trivalent passivated	Tige: Acier moyen carbone Revêtement zingué Passivation claire trivalente	Dorn: Stahl Verzinkt Klar chromatiert, Cr6-frei	Gambo: Acciaio a medio tenore di carbonio Zincato Passivazione chiara trivalente	Vástago: Acero medio en carbono Zincado Pasivado claro trivalente

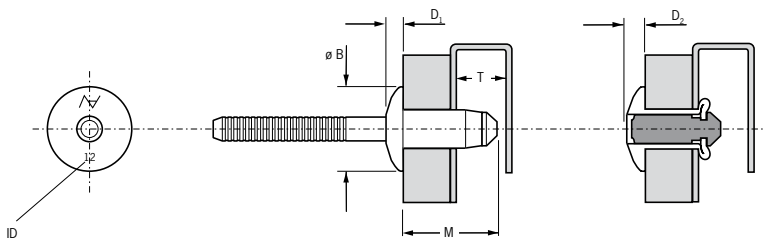

ø	[Cross-section diagram]		[Thread diagram]		ID	M	ø B	D ₁	T	D ₂	[Torque diagram]	[Torque diagram]	Part No/ref	
	min.	max.	min.	max.										max.
1/4" (6.4 mm)	.060	.138	.264	.272	12	.539	.525	.105	.480	.134	2360	1978	02221-00812	
	.110	.189			13	.590							2698	02221-00813
	.132	.211			14	.612							2810	02221-00814
	.189	.268			15	.669							2810	02221-00815
	.268	.346			17	.747							3147	02221-00817
	.295	.374			18	.775							3372	02221-00818
	.346	.425			19	.826							3597	02221-00819
	.425	.504			21	.905							3597	02221-00821

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

