

Monobolt® 2761 (SSCV)




For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Countersunk head	Tête fraisée	Senkkopf	Testa svasata	Cabeza avellanada
Body: carbon steel*	Corps: Acier au carbone*	Hülse: Stahl*	Corpo: Acciaio carbonio*	Cuerpo: Acero carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated with top seal	Passivation claire trivalente avec top seal	Klar passiviert, Cr6-frei mit Versiegelung	Passivazione chiara trivalente con sigillante	Pasivado claro trivalente con sellante
Stem: medium carbon steel**	Tige: Acier au carbone**	Dorn: Stahl**	Gambo: Acciaio carbonio**	Vástago: Acero medio en carbono**
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated with top seal	Passivation claire trivalente avec top seal	Klar chromatiert, Cr6-frei mit Versiegelung	Passivazione chiara trivalente con sigillante	Pasivado claro trivalente con sellante

*: BS 3111 Type 9 SAE 10B21 DIN 1654 22B2

** : BS 3111 Type 10 SAE 10B35 DIN 1654 35B2

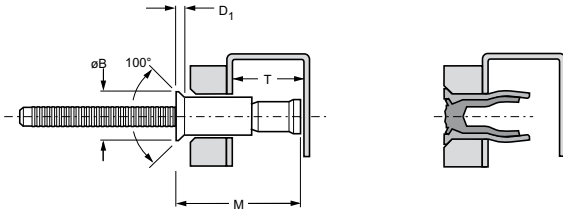

ø	Ø		Ø		M	ø B	D ₁	T	lb ^{f1}	lb ^{f1}	Part No/ref
	nom.	min.	max.	min.							
3/16" (4.8 mm)	.125	.331	.195	.201	.786	.325	.084	.410	1450	1150	02761-00615 (SSCV-06-06)
	.125	.481			1.032			.530			02761-00619 (SSCV-E06-08)
1/4" (6.4 mm)	.125	.475	.260	.276	1.037	.395	.093	.480	2650	2350	02761-00821 (SSCV-08-08)

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



www.avdel-global.com

© 2010 Infastech

Monobolt® is a trademark of Avdel UK Limited

04a.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.