

Monobolt® 2774 (BAPV)




For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy* (5 % Mg)	Corps: Alliage d'aluminium* (5% Mg)	Hülse: Aluminium* (5 % Mg)	Corpo: Lega di alluminio* (5% Mg)	Cuerpo: Aluminio* (5% Mg)
Polished	Poli	Poliert	Lucido	Pulido
Stem: Aluminium alloy** Natural	Tige: Alliage d'aluminium** Brut	Dorn: Aluminium** Blank	Gambo: Lega di alluminio** Nessuna finitura	Vástago: Aluminio** Natural

*: BS 1473 5056A DIN 1725 AlMg5 Werkstoff 3.3555

** : BS 1473 2014A DIN 1725 AlCuSiMn Werkstoff 3.1255

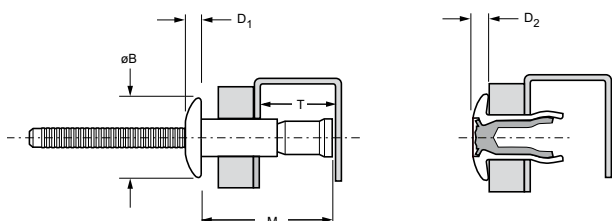

Ø nom.	ØB		D1		M	Ø B	D ₁	T	D ₂	lb ^{f1}	lb ^{f1}	Part No/ref
	min.	max.	min.	max.								
3/16" (4.8 mm)	.064	.270	.193	.200	.721	.395	.083	.410	.073	675	500	02774-00613 (BAPV-06-04)
	.064	.437			.946			.510				02774-00617 (BAPV-E06-07)
1/4" (6.4 mm)	.080	.375	.260	.275	.965	.525	.114	.510	.104	1350	950	02774-00817 (BAPV-08-06)
	.080	.625			1.366			.710				02774-00824 (BAPV-E08-10)
3/8" (10 mm)	.120	.625	.392	.409	1.425	.798	.160	.875	.156	2840	2092	02774-01228

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas